

LED Premium Street Light 30w c/w Photocell NEMA Dusk til Dawn Sensor Flicker Free

£133.63







4,200lm



30W
Replaces
35W SOX



LED Premium Street Light DIMENSIONS

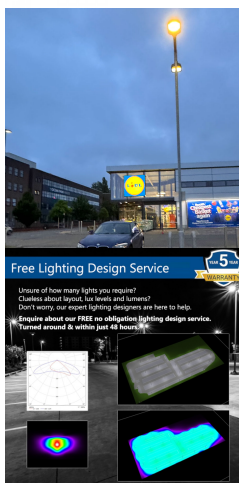

DARK SKY FRIENDLY



3000K*

PRODUCT INFORMATION

| | |
|------------------|-----------------------|
| Body Colour | Slate Grey RAL 7015 |
| LED Type | SMD3030 LEDs |
| Warranty | 5 Year |
| Part L Compliant | Yes |
| Dimensions | 617mm x 212mm x 118mm |
| Weight | 3.85kg |
| Windage | 0.08m ² |

PRODUCT INFORMATION

Socket Type Optional 3 pin NEMA Socket
Equivalent to 35 SOX

TECHNICAL SPECIFICATIONS

Power Consumption 30W
Input Voltage 100-280V AC
Power Factor >0.96
Operating Temperature -20°C to 50°C
L70 Rated Lifetime +100,000hrs
Ingress Protection IP66

LUMEN PERFORMANCE

Luminous Efficiency 140lm/W
Beam Angle 150° x 80°
CRI (Colour Rendering Index) >80Ra
Lumen Output 4,200lm

AVAILABLE OPTIONS

Colour Temperature 3000K (Dark Sky Friendly- 0% ULOR) 4000K
3-Hour Emergency Version No
Built-in Microwave Occupancy Detector No
1-10V Dimmable Available on Request
DALI Dimmable Available on Request

****Fitting Comes inclusive with integral 3-Pin NEMA Socket and Lucy Zodion 70lux Photocell****

Luminaire designed for column/post mounting at heights of 4 - 16m, with a range of sizes across 30W - 240W (4,200-33,000lm), IP66 design for exterior environments, with a low profile, sleek silver anodised aluminum body for harsh weather environments, Premium Street light is for urban applications such as car-parks, pathways and pedestrian areas. PMMA optic lens ensures a high degree of uniformity across a range of spaces and reduced light spillage, thus further

enhancing this 140lm/W luminaire to give optimum lux levels through out. Furthermore the Premium Street light is compatible with standard mains photocells. Additional benefits include 100,000 hours maintenance free performance, with no-tools/quick release access to the internal control gear for installation. Unit available with either 60mm or 76mm entry bracket for both bottom & side-entry hence universally compatible. Angle of illumination can be adjusted around 10° for increased spread. Slate Grey RAL 7015.

[DOWNLOAD PRODUCT INSTALLATION MANUAL / GUIDE](#)

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)