

LED Premium Street Light 40w c/w Photocell NEMA Dusk til Dawn Sensor

£145.08


5,600lm



40W
Replaces
70W SON



LED Premium Street Light DIMENSIONS

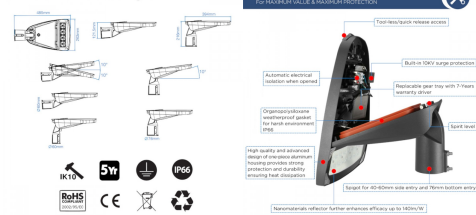

PHOTOCELL ENABLED
FOR UP TO 50% SAVINGS ON ELECTRICITY

DURABLE, ROBUST AND DEPENDABLE
LONG-LETTING PERFORMANCE



Dusk-to-Dawn sensor
 Shorting Cap
 Insect filter
 Monitor head
 UL9000
 OPTIONAL



24/7 CUSTOMER SUPPORT

ECA
 RoHS
 CE
 IN-TO

LED Premium Street Light
 Slim and elegant aesthetics
 Superior efficacy up to 140lm/W
 Wide range of luminaire packages
 Self-cleaning Smooth Surface
 Tool-less Access



Free Lighting Design Service

Unsure of how many lights you require?
 Cluttered about layout, luminaire and lumens?
 Don't worry, our expert lighting designers are here to help!
 Inquire about our FREE no-obligation lighting design service.
 Turned around & within just 48 hours!

DARK SKY FRIENDLY



3000K*



PRODUCT INFORMATION

LED Type	SMD3030 LEDs
Warranty	5 Year
Part L Compliant	Yes
Dimensions	617mm x 212mm x 118mm
Weight	3.85kg
Windage	0.08m ²
Socket Type	Optional 3 pin NEMA Socket
Equivalent to	70 SON

PRODUCT INFORMATION**TECHNICAL SPECIFICATIONS**

Power Consumption	40W
Input Voltage	100-280V AC
Power Factor	>0.96
Operating Temperature	-20°C to 50°C
L70 Rated Lifetime	+100,000hrs
Ingress Protection	IP66

LUMEN PERFORMANCE

Luminous Efficiency	140lm/W
Beam Angle	150° x 80°
CRI (Colour Rendering Index)	>80Ra
Lumen Output	5,600lm

AVAILABLE OPTIONS

Colour Temperature	3000K (Dark Sky Friendly- 0% ULOR) 4000K
3-Hour Emergency Version	No
Built-in Microwave Occupancy Detector	No
1-10V Dimmable	Available on Request
DALI Dimmable	Available on Request

****Fitting Comes inclusive with integral 3-Pin NEMA Socket and Lucy Zodion 70lux Photocell****

Luminaire designed for column/post mounting at heights of 4 - 16m, with a range of sizes across 30W - 240W (4,200-33,000lm), IP66 design for exterior environments, with a low profile, sleek silver anodised aluminum body for harsh weather environments, Premium Street light is for urban applications such as car-parks, pathways and pedestrian areas. PMMA optic lens ensures a high degree of uniformity across a range of spaces and reduced light spillage, thus further enhancing this 140lm/W luminaire to give optimum lux levels through out. Furthermore the Premium Street light is compatible with standard mains photocells. Additional benefits include 100,000 hours maintenance free performance, with no-tools/quick release access to the internal control gear for installation. Unit available with either 60mm or 76mm entry bracket for both bottom & side-entry hence universally compatible. Angle of illumination can be adjusted around 10° for increased spread. Slate Grey RAL 7015.

[DOWNLOAD PRODUCT INSTALLATION MANUAL / GUIDE](#)



Unit 2,
Delta Court,
Doncaster,
DN9 3GN
text_phone 03333 444 943
sales@theledstore.co | <https://theledstore.co/>

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)