






LED Premium Street Light 40w c/w Photocell NEMA Dusk til Dawn Sensor

£145.08



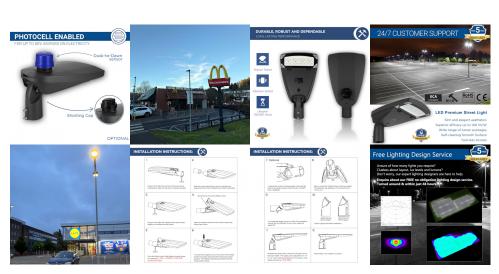



PRODUCT INFORMATION

Body Colour Slate Grey RAL 7015 LED Type SMD3030 LEDs

Warranty 5 Year
Part L Compliant Yes

Dimensions 617mm x 212mm x 118mm

Weight 3.85kg Windage 0.08m²

Socket Type Optional 3 pin NEMA Socket



PRODUCT INFORMATION

Unit 2,
Delta Court,
Doncaster,
DN9 3GN
text_phone 03333 444 943
sales@theledstore.co/ https://theledstore.co/

Equivalent to 70 SON

TECHNICAL SPECIFICATIONS

Power Consumption 40W

Input Voltage 100-280V AC Power Factor >0.96

Operating Temperature -20°C to 50°C L70 Rated Lifetime +100,000hrs

Ingress Protection IP66

LUMEN PERFORMANCE

Luminous Efficiency140lm/WBeam Angle150° x 80°CRI (Colour Rendering Index)>80RaLumen Output5,600lm

AVAILABLE OPTIONS

Colour Temperature 3000K (Dark Sky Friendly- 0% ULOR) 4000K

3-Hour Emergency Version No Built-in Microwave Occupancy Detector No

1-10V Dimmable Available on Request DALI Dimmable Available on Request

Fitting Comes inclusive with integral 3-Pin NEMA Socket and Lucy Zodion 70lux Photocell

Luminaire designed for column/post mounting at heights of 4 - 16m, with a range of sizes across 30W - 240W (4,200-33,000lm), IP66 design for exterior environments, with a low profile, sleek silver anodised aluminum body for harsh weather environments, Premium Street light is for urban applications such as car-parks, pathways and pedestrian areas. PMMA optic lens ensures a high degree of uniformity across a range of spaces and reduced light spillage, thus further enhancing this 140lm/W luminaire to give optimum lux levels through out. Furthermore the Premium Street light is compatible with standard mains photocells. Additional benefits include 100,000 hours maintenance free performance, with no-tools/quick





release access to the internal control gear for installation. Unit available with either 60mm on 16mm entry brackettforebothe.co/bottom & side-entry hence universally compatible. Angle of illumination can be adjusted around 10° for increased spread. Slate Grey RAL 7015.

DOWNLOAD PRODUCT INSTALLATION MANUAL / GUIDE

DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES

DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES

DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES