



3m Lamp Post Lighting Column 30W Premium LED Street Light Kit c/w Fuse Cutout and M8 Key (3m Above Ground)

£339.41

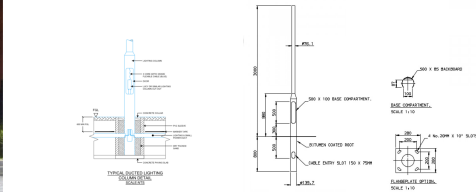

LED Premium Street Light DIMENSIONS



PRODUCT INFORMATION

LED Type Lumileds LUXEON® 5050 LEDs

TECHNICAL SPECIFICATIONS

Power Consumption 30W
Input Voltage 90-305V AC
Power Factor >0.96
L70 Rated Lifetime +100,000hrs
Ingress Protection IP66

LUMEN PERFORMANCE

Luminous Efficiency 140lm/W
Beam Angle 150° x 80°
CRI (Colour Rendering Index) >80Ra
Lumen Output 4,200lm

AVAILABLE OPTIONS

Colour Temperature Natural White 4000-4500K

Save time and order our complete LED Street Light kit which includes the following components:

3m Steel Galvanised Lamp Post:

[Root Mounted Option](#)

[Flange Plated Option](#)

Street Light:

[30W LED Street Light](#)

Fuse Cutout:

[Single Option](#)

[Twin Option](#)

Column Door Key:

[M8 Column Door Key](#)

The single option is for 1 light per column which is supplied with the inbuilt 76mm bracket.

The twin option is for 2 lights per column which is supplied with a twin projection bracket.

If adding on a photocell you must select either the 'Single' option for 1 light per column, or the 'Twin' Option for 2 lights per column.

The root mounted column is 3m above ground with a 0.8m ground root - 3.8m total length.

The flange plated column is 3m above ground with a 280mm x 280mm Base Plate -3m total length.

If unsure about the specification of an item in this kit, please see individual links to each item clicking the links above.

PLEASE NOTE.

We are unable to modify these kits in any way; they are heavily discounted to be sold as a complete kit.

We do not warrant that the goods will be fit for any specific purpose.

Please check that the specification is suitable for the proposed application.

If you need to light a certain area to a certain lux level, please ask us about our free lighting design service.

NOTE* - The above is only a typical detail & is subject to ground conditions & head weight / windage load - we advise this is checked prior to installation

| Height Above Ground (m) | Root (Below Ground) | Base Diameter (mm) | Shaft Diameter (mm) | Base Height (mm) | Shaft Height (mm) | Max Head Weight kg/m ² | Weight (kg) | Min Concrete Diameter* (mm) |
|-------------------------|---------------------|--------------------|---------------------|------------------|-------------------|-----------------------------------|-------------|-----------------------------|
| LST-3MCOL 3m | 800mm | Ø140mm | Ø76mm | 1250mm | 1690mm | 40kg / 0.4 | 27kg | 950mm |
| LST-4MCOL 4m | 800mm | Ø140mm | Ø76mm | 1250mm | 2690mm | 40kg / 0.4 | 32kg | 950mm |
| LST-5MCOL 5m | 800mm | Ø140mm | Ø76mm | 1250mm | 3675mm | 40kg / 0.4 | 37kg | 525mm |
| LST-6MCOL 6m | 1000mm | Ø140mm | Ø76mm | 1250mm | 4660mm | 40kg / 0.4 | 47kg | 269mm |
| LST-8MCOL 8m | 1200mm | Ø168mm | Ø89mm | 1250mm | 6630mm | 30kg / 0.3 | 80kg | 262mm |
| LST-10MCOL 10m | 1500mm | Ø168mm | Ø114mm | 1250mm | 8600mm | 30kg / 0.28 | 120kg | 239mm |
| LST-12MCOL 12m | 1700mm | Ø194mm | Ø114mm | 1250mm | 9840mm | 40kg / 0.33 | 190kg | 262mm |

*Root concrete diameter based on poor soil or better, minimum 230kN/m² per m

| Height Above Ground (m) | Flange Plate Size (mm) | Base Diameter (mm) | Shaft Diameter (mm) | Base Height (mm) | Shaft Height (mm) | Max Head Weight kg/m ² | Weight (kg) | Concrete Dimensions* (mm) |
|-------------------------|------------------------|--------------------|---------------------|------------------|-------------------|-----------------------------------|-------------|---------------------------|
| LST-3MCOLFP 3m | 280mm x 280mm | Ø140mm | Ø76mm | 1250mm | 1690mm | 40kg / 0.4 | 30kg | 700 x 700 x 800 |
| LST-4MCOLFP 4m | 280mm x 280mm | Ø140mm | Ø76mm | 1250mm | 2690mm | 40kg / 0.4 | 32kg | 700 x 700 x 800 |
| LST-5MCOLFP 5m | 280mm x 280mm | Ø140mm | Ø76mm | 1250mm | 3675mm | 40kg / 0.4 | 39kg | 750 x 750 x 800 |
| LST-6MCOLFP 6m | 280mm x 280mm | Ø140mm | Ø76mm | 1250mm | 4660mm | 40kg / 0.4 | 47kg | 750 x 750 x 800 |
| LST-8MCOLFP 8m | 320mm x 320mm | Ø168mm | Ø89mm | 1250mm | 6630mm | 30kg / 0.3 | 89kg | 850 x 850 x 900 |

*Concrete dimensions based on a minimum ground bearing pressure of 150kN/m² per m (Width x Width x Height)