



****CLEARANCE** 5m Aluminium Conical / Tapered Lamp Post / Lighting Column - Machine Brushed Aluminium Street Lamp Post Root Mounted 5 Metre (5m Above Ground)**

£318.00 £216.00

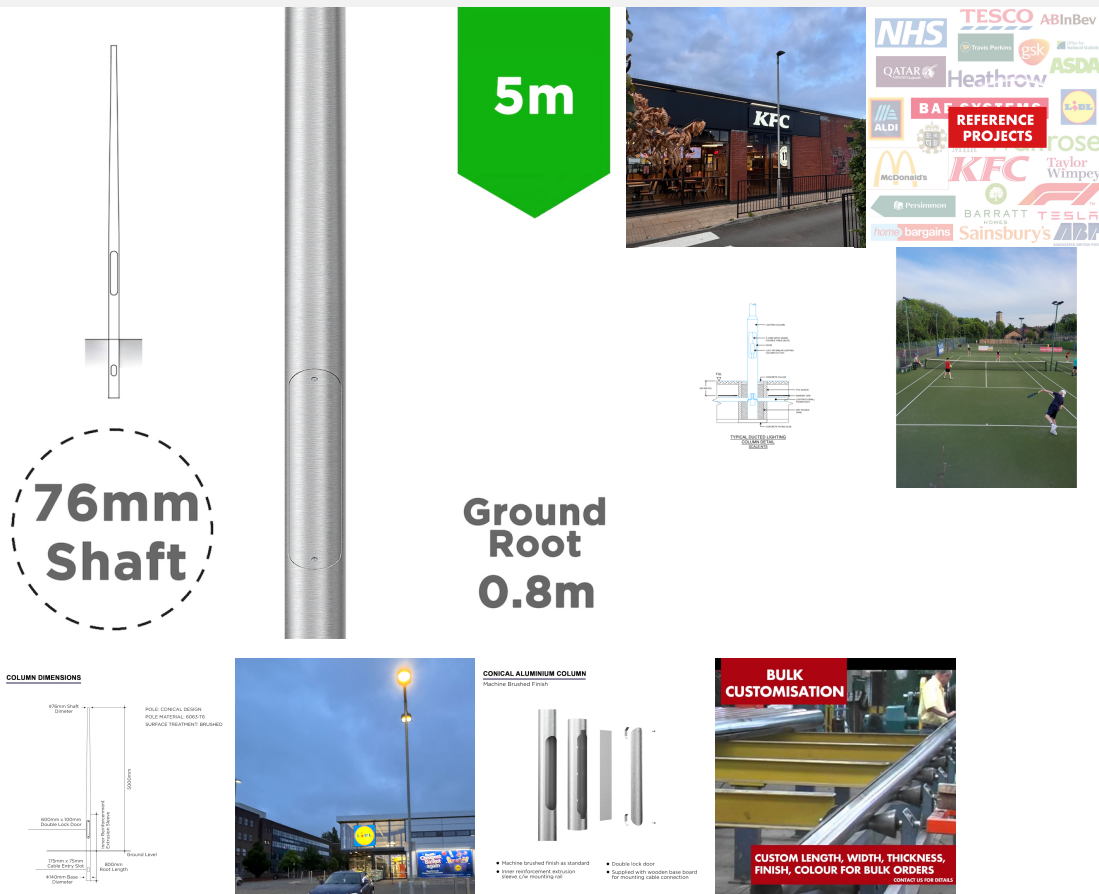


COLUMN DIMENSIONS



CONICAL ALUMINIUM COLUMN



- Machine brushed finish as standard
- Low maintenance solution
- Double lock door
- Supplied with stainless steel base board for mounting cable connection



****CLEARANCE / DAMAGED**** - The very end of the root that concretes below ground has been crushed at the end - final 10-20cm. Doesn't affect use and won't be seen once below ground. 1 of 1 available at this price.

5m Aluminium Conical Lamp Post / Lighting Column - T6 Tempered Machine Brushed Aluminium Street Lamp Post Root Mounted 5 Metre (5m Above Ground) Light duty lighting column suitable for road, residential, CCTV/security features and general amenity areas, with street lanterns, floodlights & post top amenity luminaires (please see related accessories) Designed to BSEN 40

PLEASE NOTE - Weight & Windage must be checked for suitability of the column against the installation postcode. Please email us for more information prior to purchase. It is the responsibility of the installer to ensure columns are installed safely and correctly, no liability will be accepted by The LED Store/supplier. In certain cases a ground survey may be required prior to installation. . Unit does not include column door key. Please find the link to this product below.








NOTE - if bolting down the flange plate with steel bolts or fitting mild steel brackets, you must use a separation membrane / barrier between the 2 materials such as a plastic sleeve, washers, gasket etc, to prevent cross contamination and corrosion between the aluminium and steel.

[TORX COLUMN DOOR KEY](#)

[DOWNLOAD TYPICAL LAMP POST / LIGHTING COLUMN INSTALLATION - CONCRETE ROOT MOUNTED POST*](#)

NOTE* - The above is only a typical detail & is subject to ground conditions & head weight / windage load - we advise this is checked prior to installation

Root Mounted

Dimensions (mm)							
Product Code	Height	D1	D2	Z	Door Opening	Weight (kg)	Min. Concrete Diameter*
SDACOL4M76MM	4m	76	140	800	600x100	27.0	0.30
SDACOL5M76MM	5m	76	140	800	600x100	30.0	0.35
SDACOL6M76MM	6m	76	152	800	600x100	35.0	0.30

*Root mounted columns come with bitumen protection on the root, to 200mm above ground level

NOTE - The above is only a typical detail & is subject to ground conditions & head weight / windage load - we advise this is checked prior to installation