


4m Hinged Tilt-Down CCTV Post/Pole - Fold Down Tilt-Down Pivot Square Sectional Mid-Hinged Columns for CCTV Cameras - Flange Base Plated Bolt Down


£719.40




COLUMN DIMENSIONS




GENERAL FEATURES




PRODUCT DETAILS




COLUMN DIMENSIONS



TECHNICAL SPECIFICATION



Working Capacity	12000N/2700Lb	Base Plate Length	300mm
Capacity Length	2000mm	Base Plate Width	100mm
Base Plate	4x11	Base Capacity	0.5 Ton
Base Dimensions	300mm	Base Weight	3.5kg

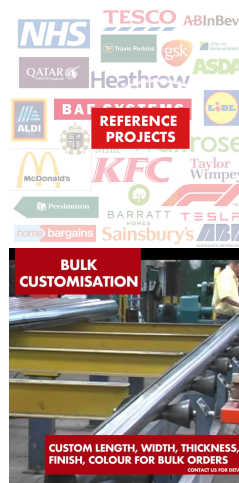

Top Bracket sold separately from drop down list of options. Otherwise supplied with round 76mm tubular top section 200mm.

Light Duty 4m Hinged CCTV Post - Fold Down Tilt-Down Pivot Square Sectional Mid-Hinged Columns for CCTV Cameras Mid-Hinged Lighting Column 4m Light duty- Steel Galvanised Tubular Street Lamp Post/. Maximum head load (Kg/m2) = 25kg /0.5 for terrain category 3. Suitable for road, residential, CCTV/security features and general amenity areas floodlights & post top amenity luminaires (please see related accessories)

76mm Pot section at the top to suit a range of ex-stock brackets.

- Modular construction for ease of assembly and installation on-site
- Ideal for restricted access areas
- Provides stable mounting platform for all camera types
- Demountable winches ensure tilt down models are secure and reduces costs on multiple installations
- Option for Internal Padlock Facility to Protect against Un-authorized Lowering
- Tilt Down models enable camera maintenance at ground level, therefore reducing maintenance costs
- Tilt Down models available in both bolt down and post mounted base versions
- A wide range of standard Accessories and Brackets available ex stock
- Quick turnaround for larger projects
- Constructed in high tensile steel and hot dip galvanised after fabrication for durability
- Option of painting over the galvanised finish in colours available from RAL colour charts

PLEASE NOTE - Weight & Windage must be checked for suitability of the column against the installation postcode. Please email us for more information prior to purchase. It is the responsibility of the installer to ensure columns are installed safely and correctly, no liability will be accepted by The LED Store/supplier. In certain cases a ground survey may be required prior to installation. . Requires raise and lower rope (max 25kg) or winch - both items sold separately. Unit does not include column door key. Please find the link to this product below.

300mm x 300mm flange plate for bolt down - requires anchor bolts subject to structural ground survey & design according to weight / wind loading. 280mm Centres.

Note - add on anti-climb spike is round and sits at the top around the bracket.

M8 COLUMN DOOR KEY

[Winch may be required for operation](#)